

LINEAR BASIC DUO

TECHNICAL DATA SHEET

revestech®


Description

BASIC drain kit that offers two types of finish: tileable on one side and steel on the other. Siphonic drain (convertible to non-siphonic) for built-in showers with 50 mm horizontal outlet and reduction to 4 mm, includes **DRY40** daterproofing membrane (25cm x 25 cm) heat-sealed onto it. Ensuring the total tightness at the most critical point. It also contains an extra pieze of **DRY40** membrbane (1,5 x 2 m) to waterproof the rest of the shower.

For additional information about membrane, go to **DRY40** membrane technical data sheet.

Component

1. Drain.
2. **DRY40** waterproofing membrane heat sealed to the BASIC drain.
3. Protection cover.
4. Hair catcher.
5. Plastic supports for grid.
6. Adapter.
7. Reducer 50/40.
8. Stainless steel channel.
9. Stainless steel grid.
10. **DRY40** membrane piece of 1,5 m x 2 m.

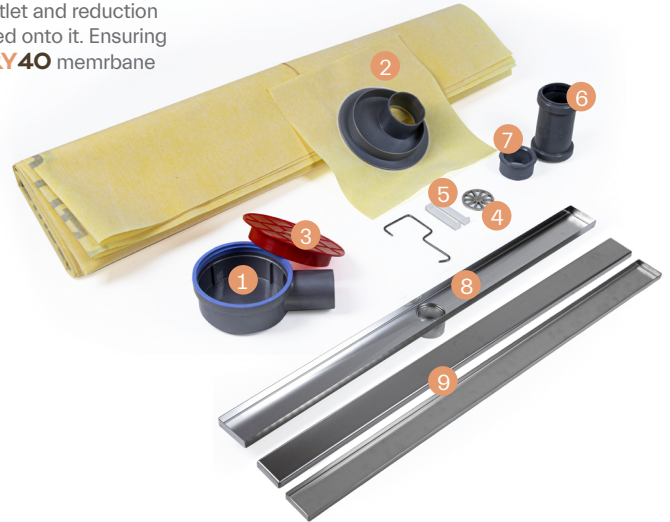


BASIC DRAIN

Features	Test Method	Unit	Value
Height		mm	60
Outlet			Horizontal
Output diameter		mm	40/50H
Flow rate		l/s	0,60
Effects of chemical products	Stable with products normally used with ceramic tiles, cleaning and maintenance.		
Colour	Grey		
Composition of drain waste and top ring	ABS		

Union membrane / waste: heat sealed

MEMBRANE **DRY40** CE Marked EN 13956:2012

Reference	Description	Membrane
544017921	DRY40 300	Rolo de 1 x 30 m (30m²)
544017938	DRY40 50	Rolo de 1 x 5 m roll (5m²)

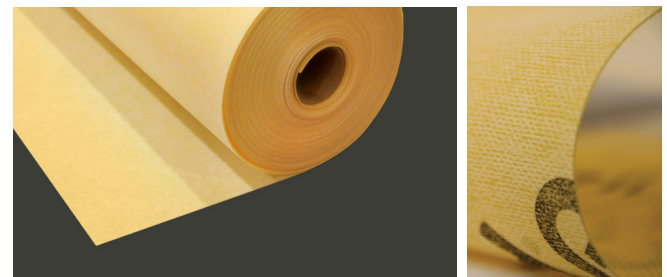

0,48 mm 290 g/m²

Flexible membrane for waterproofing walk-in shower trays, walls and floors that is adhered with a thin layer of tile adhesive. Our **DRY40** membrane is 100% waterproof and solves humidity problems that occur in other types of less reliable applications, such as rubber paint or waterproof cement. Each of our walk-in shower waterproofing kits has **DRY40** membrane heat sealed to the drain, to ensure watertightness at the most critical point.

responsible
waterproofing

LINEAR BASIC DUO

TECHNICAL DATA SHEET

2 SOLUTIONS IN 1

tileable

LINEAR BASIC DUO

steel

tileable or steel

Reference	Description	Membrane
544018348	LINEAR BASIC DUO 50	25 x 25 cm
544018362	LINEAR BASIC DUO 60	25 x 25 cm
544018379	LINEAR BASIC DUO 70	25 x 25 cm
544018386	LINEAR BASIC DUO 80	25 x 25 cm
544018393	LINEAR BASIC DUO 90	25 x 25 cm
544018409	LINEAR BASIC DUO 100	25 x 25 cm
544018416	LINEAR BASIC DUO 120	25 x 25 cm

- INCLUDES:

DRY40

membrane of 1,5 x 2 m (3 m²)

+

1. Grid 2. Hair catcher 3. Channel

4. Heat sealed membrane

5. Drain 6. Adapter 7. Reducer
- Total height (drain+grate)

77,2 mm.



LINEAR BASIC DUO


TECHNICAL DATA SHEET

revestech®

GRATE AND CHANNEL

Features	Test Method	Unit	Value
Grid measures		mm	Check drawings bellow
Effects of chemical products	Stable with products normally used with ceramic tiles, cleaning and maintenance.		
Composition	Grid: Stainless steel AISI 304; Acerinox: austenitic stainless steel with Cr-Ni coded ACX.		
Colour	Grey		

Measures

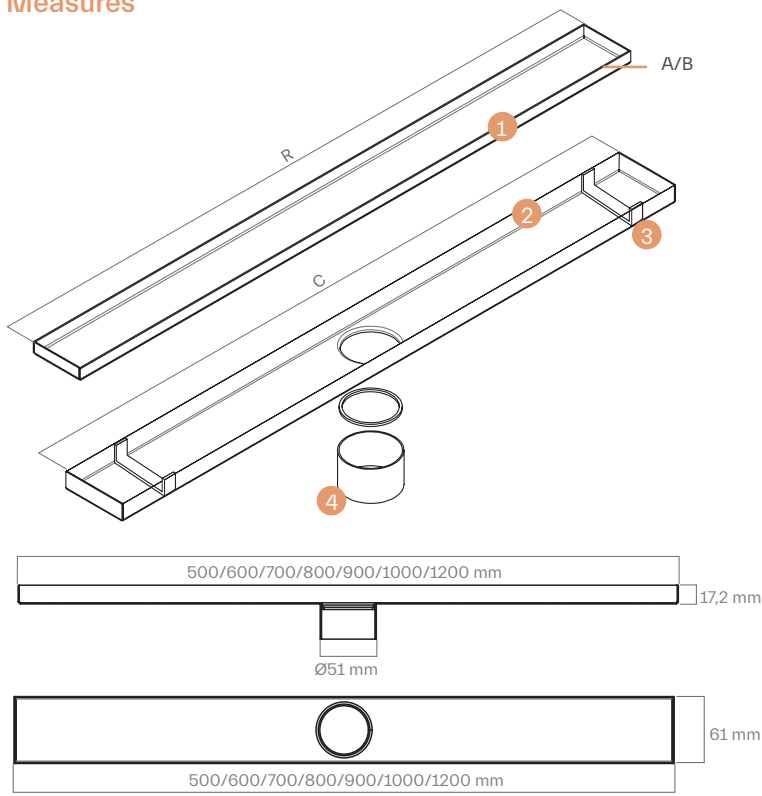


1 and 2 GRATE AND CHANNEL LINEAR BASIC DUO


Description	Comp. R	Comp. C
LINEAR BASIC DUO 60	598 mm	600 mm
LINEAR BASIC DUO 70	698 mm	700 mm
LINEAR BASIC DUO 80	798 mm	800 mm
LINEAR BASIC DUO 90	898 mm	900 mm
LINEAR BASIC DUO 100	998 mm	1000 mm
LINEAR BASIC DUO 120	1198 mm	1200 mm

3 Plastic piece for grid support

4 Channel base

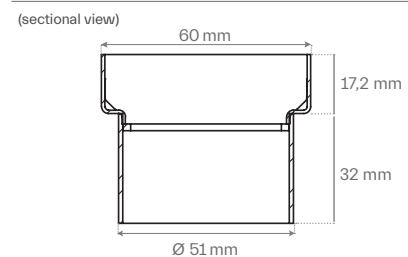

Grid stainless steel A / Tileable B



responsible
waterproofing